

# Technical Data Sheet

CODE 11133

## MF 150/6" LL

Wall axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC



G-Mark





UKCA

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,15	Voltage (V)	220-240
Absorbed Power max (W)	28	Weight (Kg)	0,98
Frequency (Hz)	50	Delivery max (l/s)	93
Insulation Class	II°	Delivery max (m³/h)	335
IP	X4	Pressure max (mmH2O)	6
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	59
Nominal Diameter (mm)	150	RPM	2100
		Sound Pressure level Lp [dB (A)] 3m	40,1

### DIMENSIONS

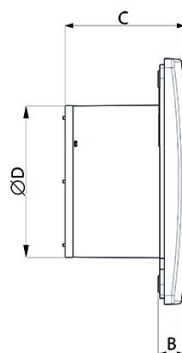

Size A (mm)	214
Size B (mm)	17
Size C (mm)	96
Size D (mm)	156

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 11133

## MF 150/6" LL


Wall axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m<sup>3</sup>/h.
- Non-return damper fitted to outlet port.
- IMQ SAFETY and IMQ PERFORMANCE certifications.
- Vortice speed controller.

### CURVES

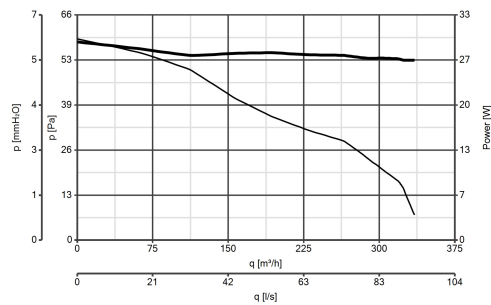


### ACCESSORIES



**C 1.5**  
**(COMANDO EL.**  
**1.5 A)**  
Code 12966



**KIT SCB**  
**(TRASF.E.C.)**  
Code 22481



**SF 150**  
Code 22164

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)