

# Technical Data Sheet

CODE 16035

## CA 200 VO Q

In-line centrifugal fans in self-extinguishing plastic





### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,45	Weight (Kg)	3,1
Absorbed power 1st speed (W)	35	Delivery 1st speed (l/s)	87
Absorbed Power max (W)	104	Delivery 1st speed (m <sup>3</sup> /h)	310
Frequency (Hz)	50	Max delivery at max speed (l/s)	224
Insulation Class	II°	Max delivery at max speed (m <sup>3</sup> /h)	805
IP	44	Pressure - 1st speed (mmH2O)	22
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	215
Max. absorbed Current at min. speed (A)	0.35	Pressure max - max speed (mmH2O)	44,7
Nominal Diameter (mm)	200	Pressure max - max speed (Pa)	438
Ø Discharge Hole (mm)	197	RPM max	2355
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	59

### DIMENSIONS



Size A (mm)	340
Size B (mm)	280
Size C (mm)	340
Size D (mm)	197
Size E (mm)	40
Size F (mm)	30
Size G (mm)	390

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 16035

## CA 200 V0 Q


In-line centrifugal fans in self-extinguishing plastic



### DESCRIPTION

- Material: self-extinguishing PP thermoplastic resin, rated V0.
- Nominal diameter 200 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
- AC motor with thermal overload cutout and shaft turning in ball bearings,
- backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

### CURVES

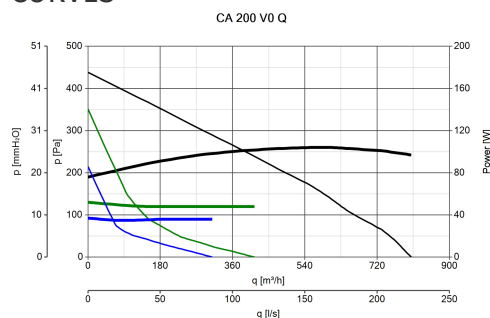

### ACCESSORIES



**SCNRB**  
**SCAT.COM.NON**  
**REV.INCASSO**  
Code 12971



**C TEMP**  
Code 12992



**C SMOKE**  
Code 12993



**C HCS**  
Code 12994



**C PIR**  
Code 12998



**C TIMER**  
Code 12999



**KIT SCB**  
**(TRASF.E.C.)**  
Code 22481



**PER INFORMAZIONI:**

Servizio al Cliente: tel +39 02 90699395 premono 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

**CA-FU 200  
(FASCETTE)**

Code 22671



**C 2.5  
(COMANDO EL.  
2.5 A)**

Code 12967

**CA-MU (STAFFE  
DI SOSTEGNO)**

Code 22674



**TRIO-CA**

Code 12869

**CA-G 200  
(GRIGLIA DI  
PROTEZIONE)**

Code 22765

**C 1.5  
(COMANDO EL.  
1.5 A)**

Code 12966