

Technical Data Sheet

CODE 16255

CA IL 160

Compact flat in-line centrifugal fans



Certifications


CE CE

EAC EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of speeds	3
Insulation Class	I°	Voltage (V)	230
Max ambient temperature for continuous operation (°C)	40	Weight (Kg)	6
Motor Class	F	Delivery max (l/s)	128
Motor IP protection	44	Delivery max (m³/h)	460
Nominal Current at max speed (A)	0,46	Pressure max (mmH2O)	45,9
Nominal Current at min speed (A)	0,41	Pressure max (Pa)	450
Nominal Diameter (mm)	160	Sound power level - radiated Lw [dB(A)]	57
Nominal Power at max speed (W)	100	Sound power level exhaust inlet Lw [dB(A)]	67
Nominal Power at min speed (W)	50	Sound power level supply outlet Lw [dB(A)]	69

DIMENSIONS

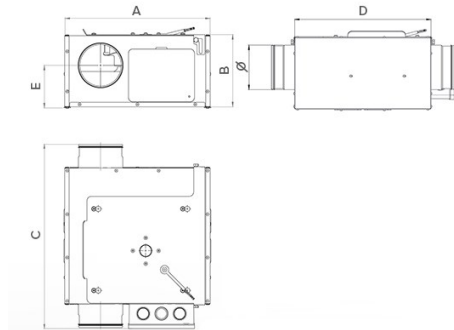

Diametro Ø (mm)	160
Size A (mm)	390
Size B (mm)	198
Size C (mm)	467
Size D (mm)	362
Size E (mm)	98

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16255

CA IL 160

Compact flat in-line centrifugal fans




DESCRIPTION

- Casing and motor-support made of galvanized sheet steel; lined internally with PE sound-proof panel (thickness 10 mm).
- Circular spigots for connection to standard tubes, equipped with double lip rubber seal for perfect air tightness.
- Nominal diameter: 160 mm.
- External rotor AC motorfan, with shaft turning in ball bearings, coupled to a backward curved centrifugal impeller.
- Galvanized steel sheet brackets, directly coupled to casing.
- Electric connection box accomodating capacitors, molded with shock-proof plastic resin resistant against aggressive agents, integrating cable

cages and cable glands to ensure high protection (IP55) against dust and water.

- 3 alternative installation: wall, ceiling and false-ceiling.
- Easy maintenance: motor is directly fixed to the cover, in turn hinged to the casing, allowing easy external rotation and motorfan direct access.
- Protection against dust and water: IP44.
- Electric insulation class: I (grounding is required).

CURVES

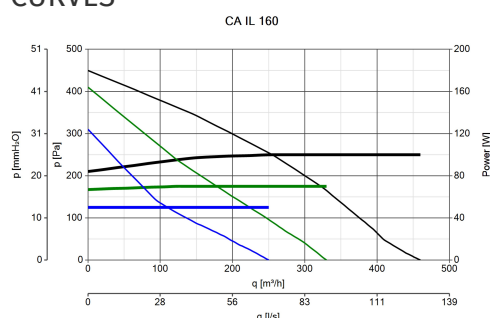


ACCESSORIES



PGR 250
(PERSIANA GRAVITA')

Code 50150



TRA 250
(TELAIO CON RETE ANTINF.)

Code 51150



C 1.5
(COMANDO EL. 1.5 A)

Code 12966



GR 160

Code 21180



FS 160

Code 21185



TRIO D

Code 12866



IREM D

Code 12867

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com