

Technical Data Sheet

CODE 11202

M 100/4" LL

Wall/window axial fans



IMQ




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,1	Voltage (V)	230-240
Absorbed Power max (W)	18	Weight (Kg)	0,6
Frequency (Hz)	50	Delivery max (l/s)	25
Insulation Class	II°	Delivery max (m³/h)	90
IP	X4	Pressure max (mmH2O)	3
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	29
Nominal Diameter (mm)	100	RPM	2300
Ø Discharge Hole (mm)	99	Sound Pressure level Lp [dB (A)] 3m	37,5

DIMENSIONS

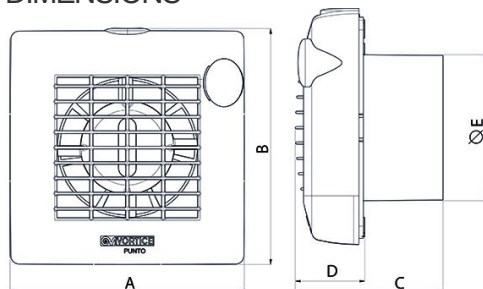

Size A (mm)	159
Size B (mm)	160
Size C (mm)	100
Size D (mm)	47
Size E (mm)	Ø 99

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11202

M 100/4" LL

Wall/window axial fans




DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing

- Vortice speed controller.

CURVES

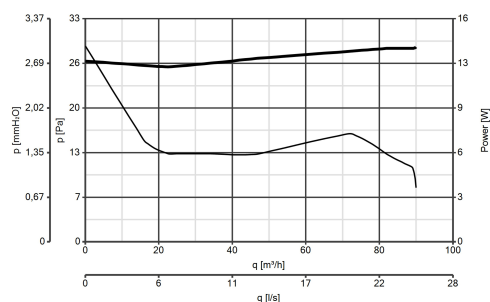

ACCESSORIES



← SCNRB
SCAT.COM.NON
REV.INCASSO
Code 12971



C 1.5
(COMANDO EL.
1.5 A)
Code 12966



KIT SCB
(TRASF.E.C.)
Code 22481



S 100/4
Code 22154



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com